



FLEXMAR™ NextGen® 100% All Polyaspartic Floor Coatings Systems

FLEXMAR™ 2-Coat High-Build Vinyl Chip System


11-19 MILS DFT; ARCAT Decorative Resinous Flooring Specification 2.3

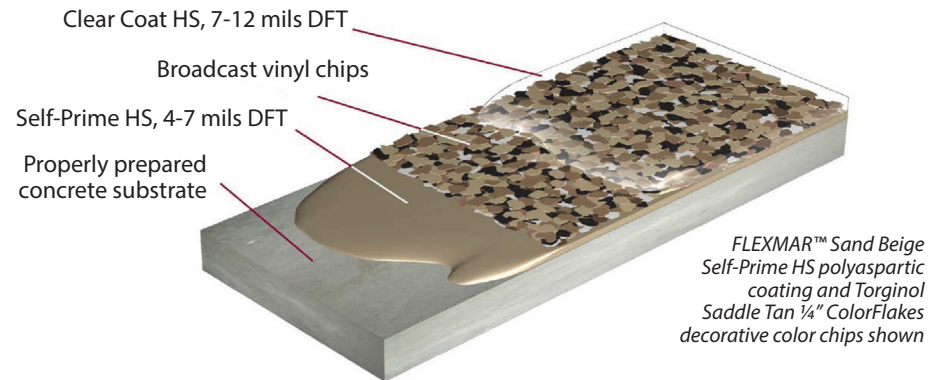


3-Coat High-Build Vinyl Chip System




High-Build Reverse Vinyl Chip System




High-Build Silica Sand System

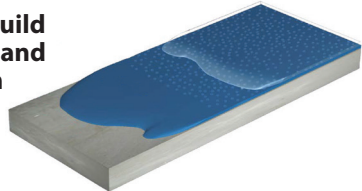


3-Coat High-Build Solid Color System




2-Coat High-Build Clear Coat System

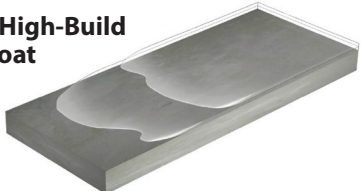


3-Coat High-Build Colored Quartz System



High-Build Metallic Color System

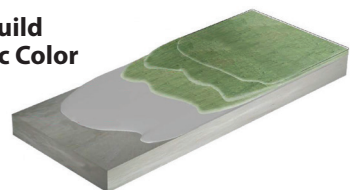

Industrial Quartz Full Broadcast System



If it isn't FLEXMAR™, it's just another coating.

Your FLEXMAR™-Qualified Applicator:



FLEXMAR™ polyaspartic coatings and sealers contribute toward satisfying credits in the Indoor Environmental Quality and Materials and Resources categories under LEED.*

*USGBC™ and related logo is a trademark owned by the U.S. Green Building Council and is used with the permission. "LEED" is a trademark owned by the U.S. Green Building Council and is used with the permission.

FLEXMAR™
COATINGS, INC.

Toll-Free: 877-339-1442
www.FlexmarPolyaspartics.com

Information in this brochure is the property of FLEXMAR™ Coatings, Inc. and may not be used without express consent of FLEXMAR™ Coatings.

Copyright © 2010, 2011, 2015, FLEXMAR™ Coatings, Inc.

FLEXMAR™
NextGen™

Polyaspartic Coatings for Commercial Flooring

3 1/2 Hours*
From First Coat of
FLEXMAR™ NextGen® to
Walk-on Return to Service


*2-coat system 500-1,500 sq ft. installation

BEFORE

AFTER

877.339.1442
www.flexmarpolyaspartics.com

 **Quick Return To Service**

 **0-Voc**

 **Virtually No Odor**

 **All Temperature Installation**

 **Non-Yellowing**



Impervious to
Chemicals



Scratch
Resistant



Chip
Resistant



Color Won't
Fade or Yellow

Durable, Long-Lasting, Easy-to-Maintain Coatings for Your Commercial Concrete Surfaces

FLEXMAR™ NextGen®— polyaspartic coatings lead the concrete coatings industry by outperforming and outlasting other polyaspartics, epoxies, and polyurethanes. They're rugged enough to withstand abrasion, scratching, and wear from heavy foot and vehicle traffic, and staining and degradation from most household foods and chemicals. But they're beautiful enough to provide a bright, clean, revitalized appearance to your commercial flooring.

3 1/2 Hours* From First Coat of FLEXMAR™ NextGen® to Walk-on Return to Service



Mix Factory Pigmented /
1 to 1 Mix Ratio Base Coat



Base Coat Applied



Color Flakes Applied



Allow Floor to Cure



Excess Color Flakes Removed



Clear Sealer Applied



Wait 1 Hour



3 1/2 Hours Return To Service

FLEXMAR™ NextGen® is quick and easy to install

But that's not the most important feature.
The key is the time it doesn't take for installation.

Our coatings require minimum maintenance and last an extremely long time. We can have your floors ready and back in action in less than a day, minimizing downtime.

- ✓ Restaurants
- ✓ Medical Treatment Facilities
- ✓ Schools
- ✓ Recreation Halls
- ✓ Aircraft Hangers
- ✓ Manufacturing Facilities
- ✓ Warehouses
- ✓ Universities
- ✓ Fire Stations
- ✓ EMS Services
- ✓ Dealerships
- ✓ Retail Stores
- ✓ Office Buildings
- ✓ Apartment Complexes

FLEXMAR™ NextGen® 100% all polyaspartic floor
coatings can be installed directly over existing tile floors.



BEFORE



AFTER

*2-coat system 500-1,500 sq. ft. installation