

Return to Service within 2 hours

Polyaspartic Coatings for Residential Basement Floors



BEFORE

AFTER

Prep


8 a.m.
Project Begins



FLEXMAR™ Qualified Installer arrives at 8 a.m. to prepare 4 Hour Basement Floor installation

Install


8 a.m. - 12 p.m.
4 Hour FLEXMAR™ Basement Floor Installation in as Little as 4 hours



4 Hour FLEXMAR™ Basement Floor Installation in as Little as 4 hours


Cure & Walk-on

12 p.m. - 2 p.m.
1-2 Hours Cure and Then Walk-On Return to Service and Return of Belongings*



FLEXMAR™ NextGen™ cures and is ready to walk-on and return basement contents

A Wide Variety of Vinyl Chip Blends to Achieve the Perfect Look for Your Home

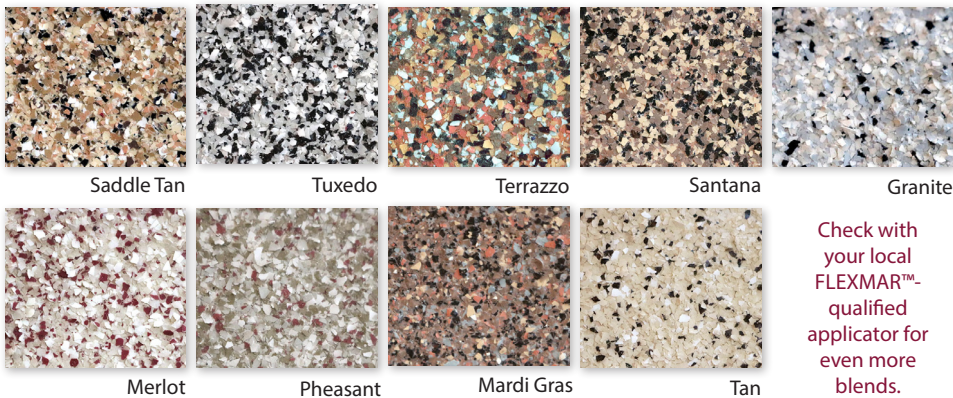

**FLEXMAR™ NextGen™
4 Hour Basement Floor
Homeowner Benefits**

- Restore basement contents same day
- No need to store basement contents elsewhere overnight

Convenient installation in as little as 4 hours with walk-on return to service and return of basement contents in 1-2 hours after installation.*

Durable, Long-Lasting, Easy-to-Maintain Coatings for Your Home

FLEXMAR™ NextGen™ polyaspartic coatings lead the concrete coatings industry by outperforming and outlasting other polyaspartics, epoxies, and polyurethanes. They're rugged enough to withstand abrasion, scratching, and wear from heavy foot and vehicle traffic, and staining and degradation from most household foods and chemicals. But they're beautiful enough to provide a bright, clean, revitalized appearance to your home.



Impervious to Chemicals



Scratch Resistant



Chip Resistant



Color Won't Fade or Yellow

FLEXMAR™ NextGen™ Polyaspartic Coatings Offer Exceptional Performance

4X MORE DURABLE THAN EPOXIES



0-Voc



Virtually No Odor



All Season Installation



Easy To Clean & Maintain

Resinous, Liquid Applied, Seamless Flooring



Resinous

Two-component NextGen polyaspartic coatings systems.



Liquid Applied

Flexmar NextGen polyaspartics are poured and rolled onto the concrete flooring.



Decorative

Vinyl chips are broadcast to rejection into the still-wet polyaspartic base coat.



Seamless

Cracks and seams are filled in and ground to create a seamless surface.

Your FLEXMAR™-Qualified Applicator:

FLEXMAR™
COATINGS, INC.

Toll-Free: 877-339-1442
www.FlexmarPolyaspartics.com

**Applicator
Business Card**